

Argus Series B330

Upgraded to 5MP resolution, Argus Series B330 brings you brand new monitoring experience. Featured with a PIR motion sensor and advanced detection algorithms, it can smartly distinguished people, vehicles, and pets from other objects. The existence of spotlights makes it possible to capture a clear colorful image when it is dark. Being completely wire-free also adds great convenience to security monitoring.

1. Specs



1	Spotlight
2	Status LED
3	6 IR LEDs
4	Lens
5	Daylight Sensor
6	Built-In Mic
7	Built-In PIR Motion Sensor



1	Reset Hole		
2	Power Switch		
3	MicroSD Card Slot		
4	Mount		
5	Battery Status LED		
6	USB-C Port		
7	Speaker		
<table border="1"> <tr> <td>Status Light</td><td>Camera Status</td></tr> </table>		Status Light	Camera Status
Status Light	Camera Status		

Red light	Wi-Fi connection failed
Blue light	Wi-Fi connection succeeded
Blinking	Standby status
On	Working status

2. Setup and Install

Set up the Camera

What's in the Box


Note: The package content may vary and update with different version and platforms, please take the below information only for a reference. And the actual package content are subject to the latest information on the product selling page.
Argus Series B330



Argus Series B330*1



USB-C Cable*1



Quick Start Guide*1



Security Bracket*1



Strap*1



Mounting Template*1



Surveillance Sticker*1



Pack of Screws*1



Reset Needle*1

Set up the Camera on the App


Please follow the steps below to do initial setup for the battery-powered cameras via Reolink App.

Step 1. Power on the camera. Remember to turn on the power switch on the camera before initial setup. After a startup sound, you will hear a **repeated Ding**


sound or a **voice prompt**.

Note: The voice prompt you will hear may be "Welcome to Reolink, please install Reolink app and scan the QR code on the camera" in multilingual versions, or "please run Reolink app, add the camera and set it up".


Step 2. Tap the icon  in the top right corner to start the initial setup.

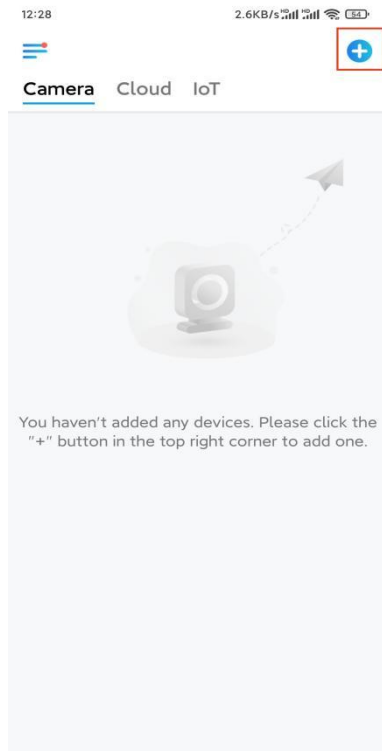

Step 3. Scan the QR code on the back of the camera. You may tap **Light** to enable a flashlight when setting up the camera in a dark environment. If the phone doesn't respond, please tap **Input UID/IP** and then manually type in the UID (16-digit characters under the QR code of the camera). Then click **Next**.

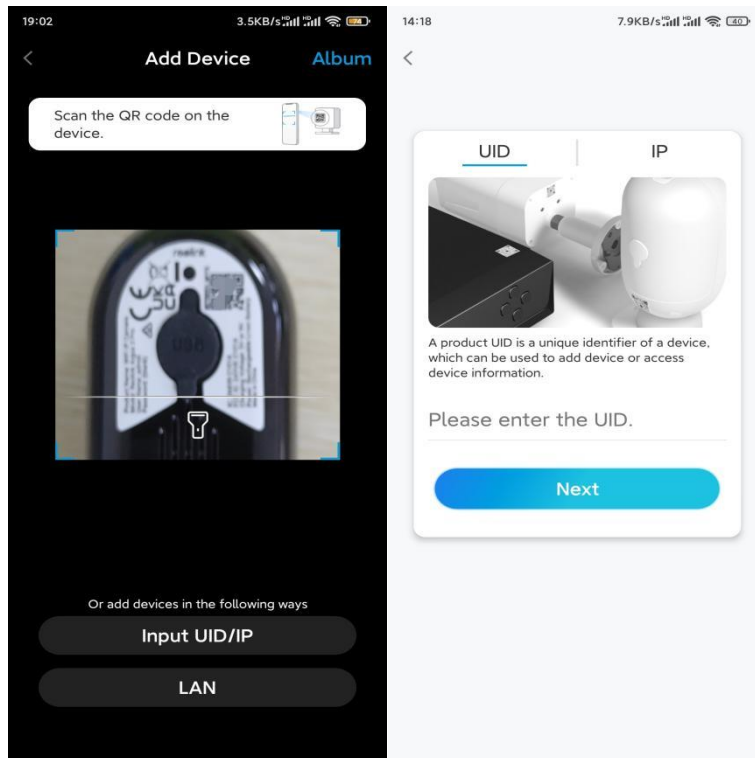

Step 4. Select **Wi-Fi Not Configured**. Make sure that the camera is powered and turned on, tap **Next**. If you hear a voice prompt played by the camera, please tick correspondingly and then tap **Next**.

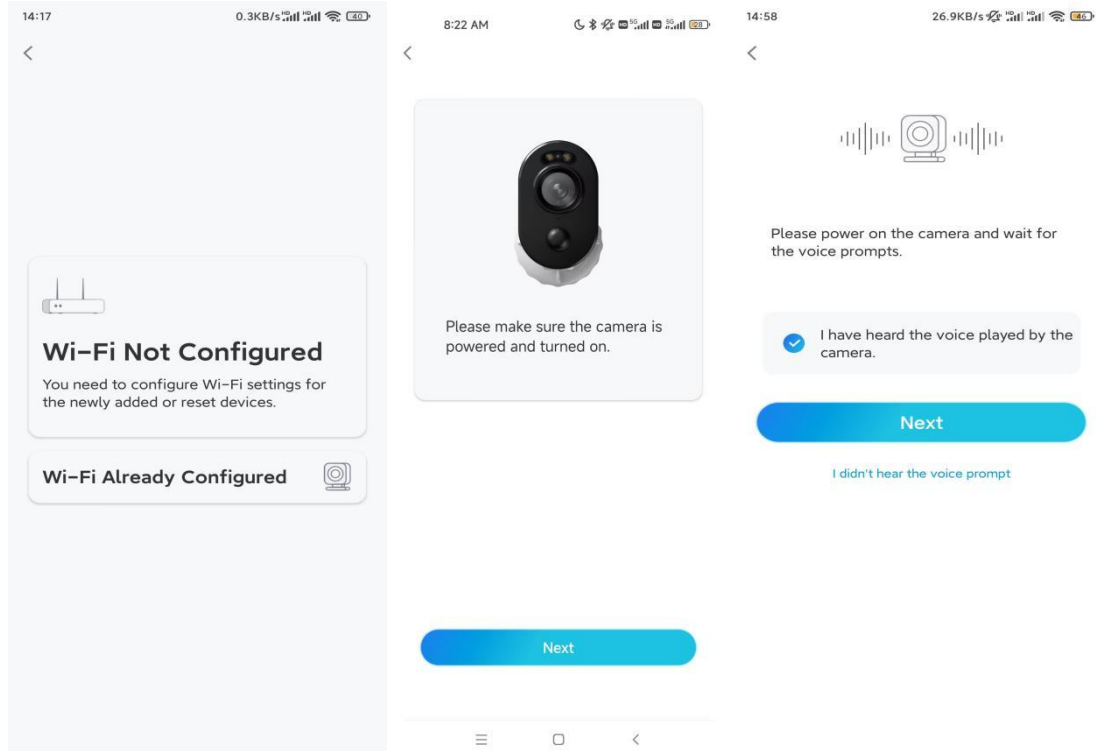


Step 5. Enter the WiFi password of the selected WiFi network (you may tap the right eye icon to see and double-check the password) and tap **Next**.




Note: Argus Series B330 supports 5GHz/2.4GHz dual-band WiFi connection.

Step 6. Tap **Scan Now**. Place the QR code on your phone in front of the camera's lens at a distance of about 20 cm (8 inches) and let the camera scan the QR code. After hearing a short beep sound from the camera, tick correspondingly and tap **Next**.

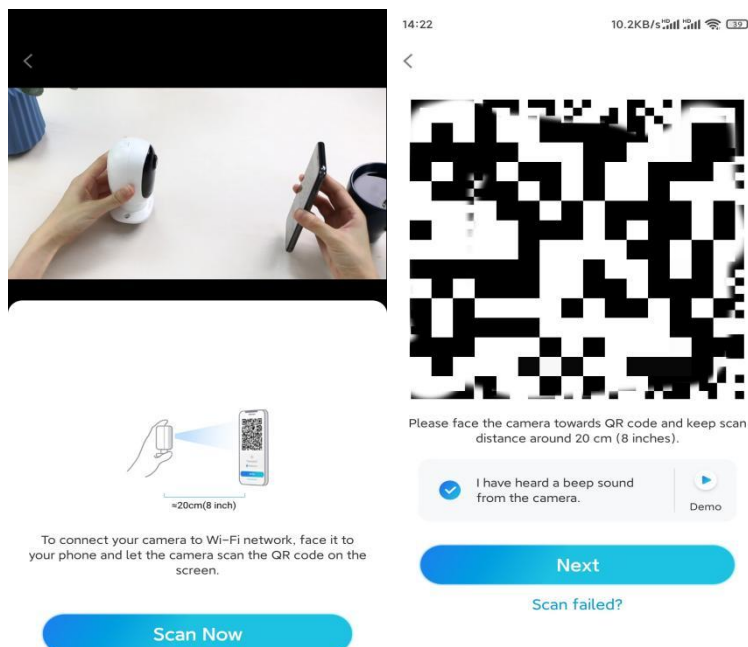


Step 7. Wait around 60 seconds for the camera to connect to the router. After


hearing "connection to the router succeeded", tick correspondingly and tap **Next**.

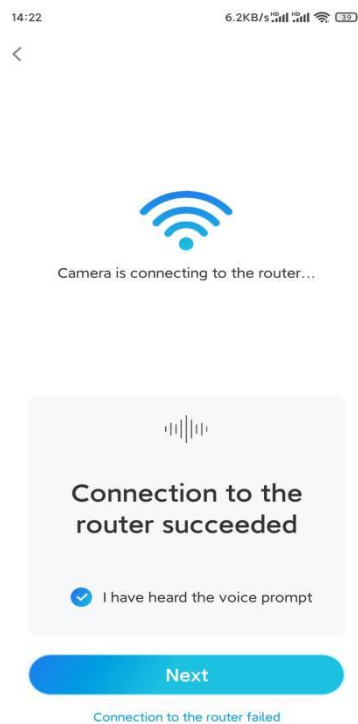

Step 8. Create a login password and then name your camera.

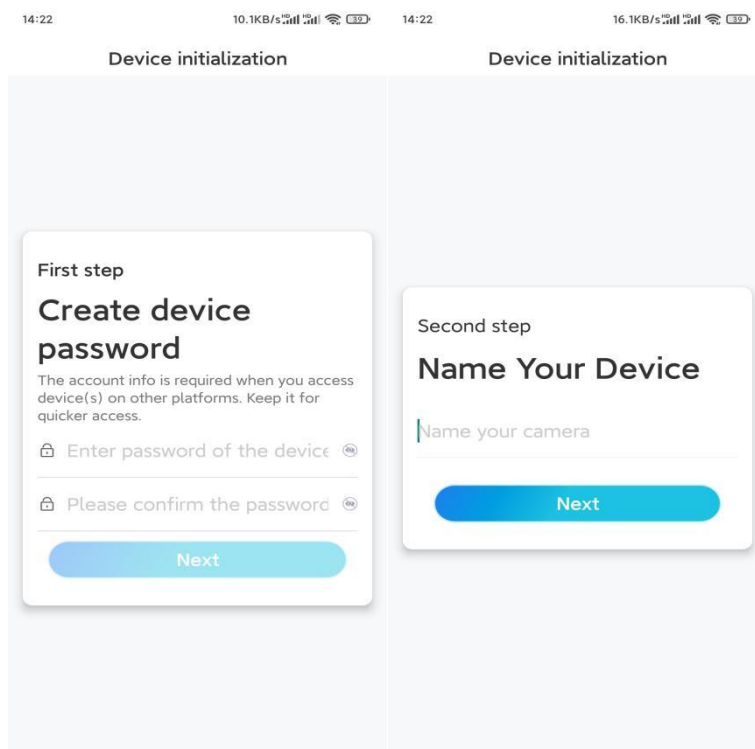

Step 9. Read the note below and then tap **Finish** to complete the initialization of your camera.

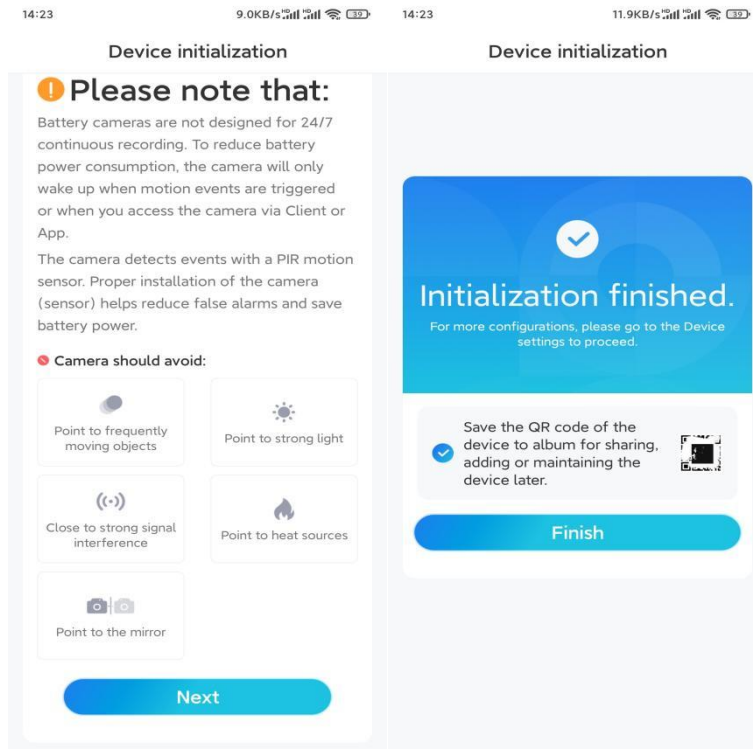


Once the initial setup is completed, you may choose a good position to mount your camera.

Install the Camera


We offer you guides on three different scenes in which the camera could be installed. Check them out respectively.

Mount the Camera to the Wall


Step 1. Rotate to separate the base from the security mount.




Step 2. Drill holes with the mounting template and screw the base of the mount onto the wall. Then attach the other part of the mount to the base.

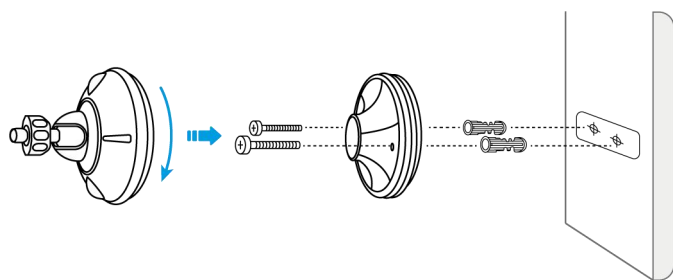

Step 3. Screw the camera to the mount. Adjust the camera's angle to get the best field of view.

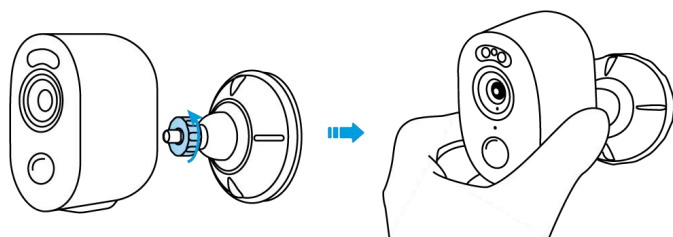

Step 5. Secure the camera by turning the part on the mount identified in the chart clockwise.




Note: To adjust the camera angle later, please loosen the mount by turning the upper part counterclockwise.

Install the Camera with Loop Strap

If you'd like to install the camera to a tree stem, follow up on the mounting method below.

Step 1. Thread the loop strap through the slot at the bottom of the security bracket.

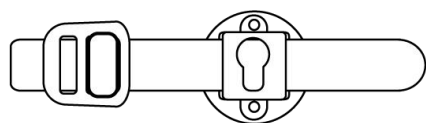

Step 2. Fasten the strap around the tree tightly.

